


Enbrighten Zigbee Plug-in Dual-Outlet Smart Dimmer

enbrighten®

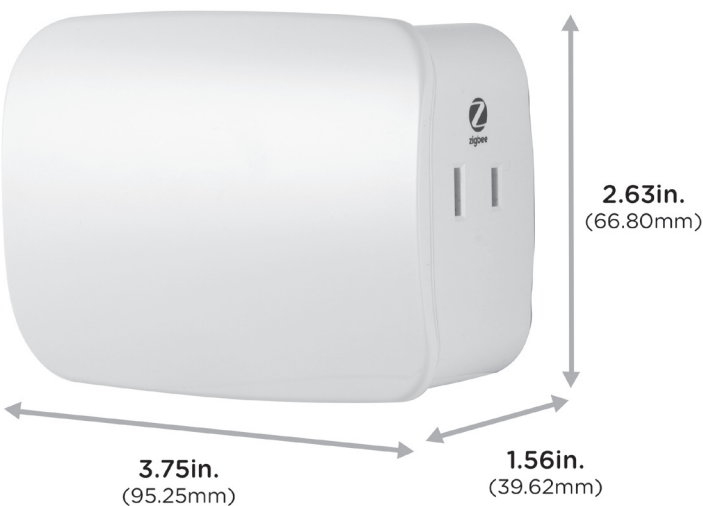

Specifications

Power: 120VAC, 60Hz **Signal Frequency:** 2.4GHz

Maximum load for the Zigbee controlled outlet:

2.5A, 300W incandescent/150W dimmable CFL/LED
Zigbee controlled outlet is fused @ 5A. This fuse is not user serviceable

Range: Up to 150ft. from controller or closest Zigbee device

Operating Temperature: 32-104° F (0-40° C)

Warranty: 5-year limited product warranty

For indoor use only


Design Features

- Remote ON/OFF/brightness control via the Zigbee controller
- Manual ON/OFF/brightness control with the manual/program button
- Works with Google and Alexa (requires compatible hub*)
- Two Zigbee controlled AC outlet for standard incandescent lighting or dimmable CFL/LED lamps
- Over-the-air updates – once joined to your Zigbee network, the smart dimmer can automatically receive updates through your Zigbee gateway
- Zigbee 3.0 certified for simple pairing and integrated home automation
- LED status indicator – indicates smart dimmer scanning during network pairing process
- Space-efficient design
- Does not block the lower outlet when plugged in to the upper outlet of a duplex wall receptacle – assumes the duplex receptacle is mounted with ground pin down
- Plugs and cords route to the side allowing close placement of furniture
- Visit ezzigbee.com/hubs for hub compatibility
- Trilingual instruction manual – English, French, Spanish

Zigbee Features

- Effortless device pairing to Zigbee certified gateways
- Backward compatible with all generations of Zigbee devices
- Supports wireless upgrades to future-proof your home

* Requires Zigbee hub or controller – functions may vary depending on brand

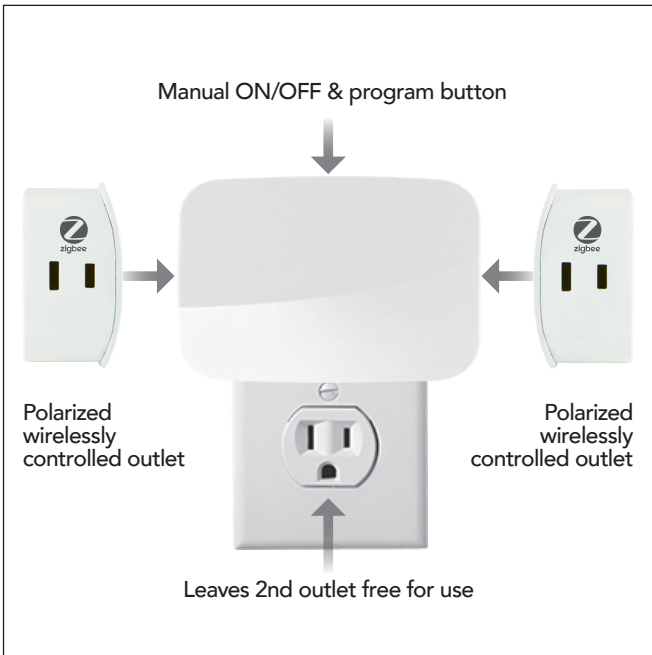

**Save Energy,
Save Money**



**Full-Range
Dimmability**

Two-Outlet Smart Dimmer

Wirelessly control both outlets simultaneously

Adjust brightness level from 0-100%.

Dimming lights cuts energy cost and extends bulb life.
Dims in 1% increments.

Device Configuration

Adding your devices to a Zigbee network

Once the hub is ready to add the smart dimmer, pairing begins automatically when power is supplied. The dimmer appears in the controller's menu when paired.

To remove and reset the device

Choose to remove the lighting device as instructed by your hub. The controller indicates the smart dimmer was removed.

To return to factory defaults

If plugged in, unplug the dimmer. Press the program button while plugging in the dimmer – must release button within four seconds of plugging in the dimmer.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2020

V1 3/22/20

Related Products – Enbrighten Zigbee Smart Controls



43094
Plug-In
Dual-Outlet
Smart Switch



43100
Plug-in
Outdoor
Smart Switch



43076
In-Wall
Smart Switch,
Paddle



43077
In-Wall
Smart Switch,
Paddle 120/277



43084
In-Wall Smart
Switch, Toggle



43080
In-Wall
Smart Dimmer,
Paddle



43090
In-Wall
Smart Dimmer,
Toggle



43102
In-Wall
Smart Outlet